



**Part Number Modeling System:**

ECC2 - 2.6 A E - X 1 C

**CIRCULATOR SERIES**  
 ECC 01: 0.10 to 1.00 GHz  
 ECC 02: 1.00 to 2.00 GHz  
 ECC 03: 2.00 to 4.00 GHz  
 ECC 04: 4.00 to 8.00 GHz  
 ECC 05: 8.00 to 12.00 GHz  
 ECC 06: 12.00 to 18.00 GHz

**CENTRE FREQ  $f_0$  (GHz)**

**BANDWIDTH OPTION**  
 A:  $f_0 \pm 5\%$   
 B:  $f_0 \pm 10\%$   
 C:  $f_0 \pm 15\%$


**AVERAGE POWER (W)**  
 A: 5W  
 B: 10W  
 C: 20W  
 D: 30W  
 E: 50W  
 F: 100W  
 G: 200W  
 H: 500W

**TEMPERATURE OPTION**  
 C: 0 to +70°C  
 I: -40 to +85°C  
 M: -55 to +125°C  
 N: -10 to +55°C


**CONNECTORS**  
 1: SMA (F)  
 2: SMA (M)  
 3: N (F)  
 4: N (M)  
 5: 7/16 (F)  
 6: 7/16(M)

**PACKAGE STYLE**  
 X: Outline X  
 Y: Outline Y  
 Z: Outline Z

**OUTLINE X:**

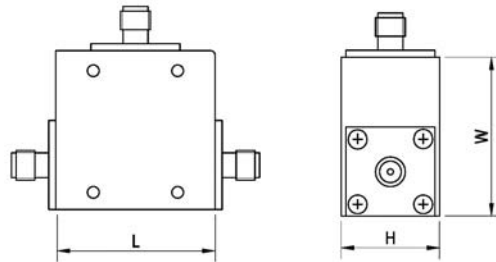

**OUTLINE Y:**

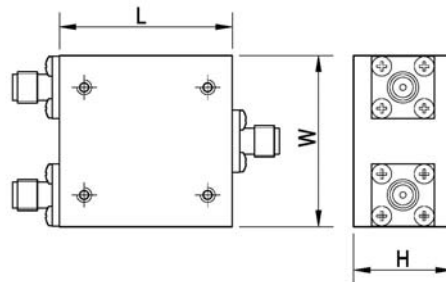

**OUTLINE Z:**

