



## Power Handling

### POWER HANDLING vs. FREQUENCY

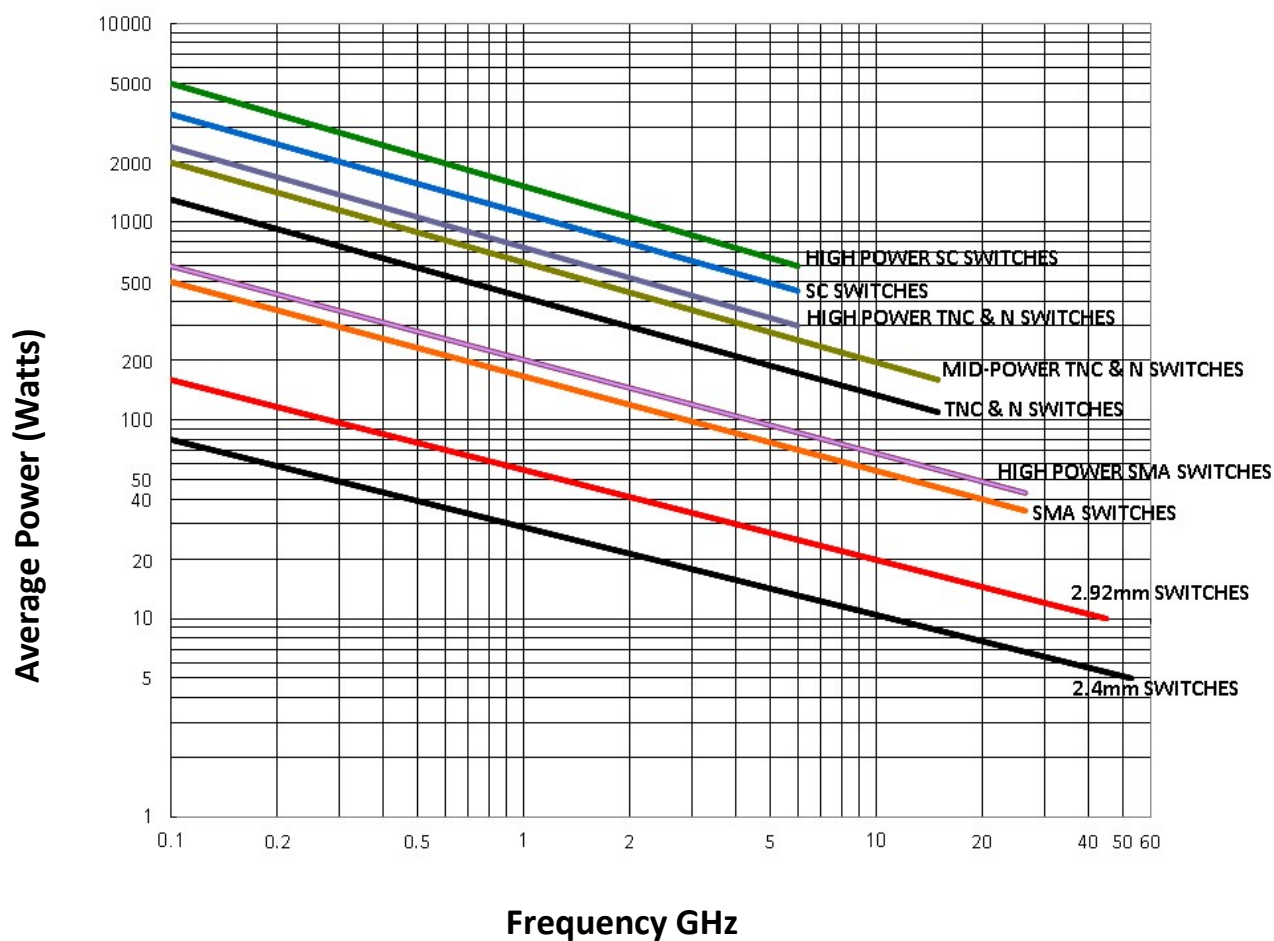

### Power Handling Derating vs. Load VSWR

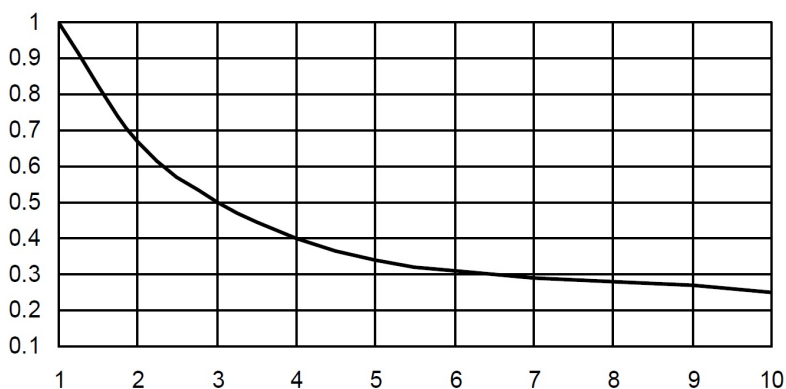

Power handling chart base on the following reference conditions:

- Ambient temperature of 40°C or less
- Sea level operation
- Load VSWR of 1.20:1 Maximum
- No high-power (hot) switching

Please contact EPX Microwave for testing factors when applications do not meet the foregoing reference conditions.